# RF Duplexer 1500MHz / 30W






This is a cavity duplexer for 1500 MHz GMR band operation.


All connectors are SMA (female).

It can support op to 30W of RF power.

It is not suitable for outdoor environments.

## **RX/TX Attenuation Diagram**

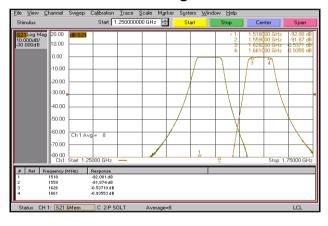

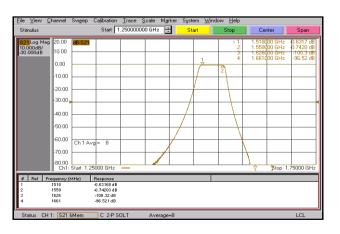

## **Beyond this product**

sysmocom not only offers this product, but a variety of other products and services, such as

- **sysmoNITB starterkit** complete ready to run 2G, 3G5 and/or 4G solution for lab testing
- Cellular Network Infrastructure a comprehensive suite of elements for 3GPP cellular networks
- **sysmoOCTSIM / sysmoQMOD** solution for remote SIM operation for cellular modems
- SIMtrace2 debug and trace SIM card communication
- sysmoSIM SIM cards, pre-programmed and with custom printing
- sysmoBTS range from 1TRX 0.2W to 2TRX 2x10W
- extensive portfolio of support contracts for all sysmocom Products
- **training services** for installation, network deployment, operation
- vendor-agnostic integration and interoperation with other vendor RAN and Core Network products
- variety of sectorized and omni-directional antennas a s well as RF cabling and accessories

#### **Custom-tailored GSM solutions**

sysmocom is not just another RAN vendor with a fixed product portfolio. All our products are based on Open Source software components, permitting customization both by sysmocom as well as the customer.

Access to the source code is key in enabling our customers to create products and services outside the constraints of existing, standardized GSM protocols, interfaces or procedures. Any aspect of our products can be modified according to customer needs.

#### **Contact Information**

We appreciate inquiries from end-users, operators as well as retailers.


sysmocom – systems for mobile communications GmbH Siemensstr. 26a, 10551 Berlin, GERMANY


Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de
web: http://sysmocom.de/

# RF Duplexer 1800MHz / 30W



### **Dimensions**

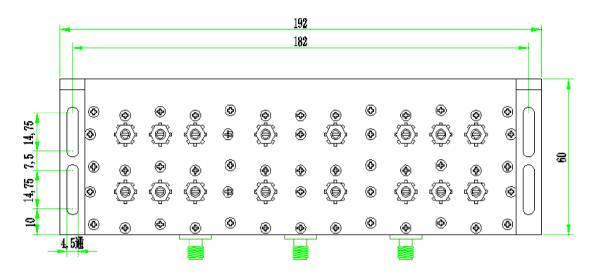

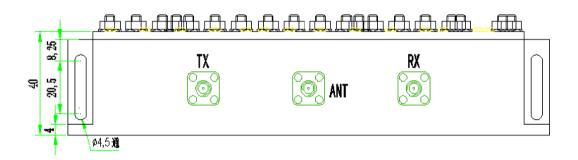

# **Specifications**

	TX	RX
Pass Band	1626 - 1661 MHz	1518 - 1559 MHz
Insertion Loss	1.0 dB	1.0 dB
Passband Ripple	1.0 dB	1.0 dB
Isolation RX/TX	> 80 dB	> 80 dB
Return Loss	minimum 20 dB	
Impedance	50 Ohms	
Power	30 W average RF power	
Temperature	-20 to 70 Centigrade	
Dimensions	192x60x47 mm	
Weight	640 g	
IP-Rating	IP50	

## **Order Code**

dx1500-kt30

sysmocom – systems for mobile communications GmbH Siemensstr. 26a, 10551 Berlin, GERMANY

Phone: +49-30-60987128-0
Fax: +49-30-60987128-9
e-mail: info@sysmocom.de/
web: http://sysmocom.de/